




MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	380	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8118	PAGE	19-H
	APPR BY		DATE	

RATING	FRAME	6 INCH SUB	HP	20
	MODEL	236614	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

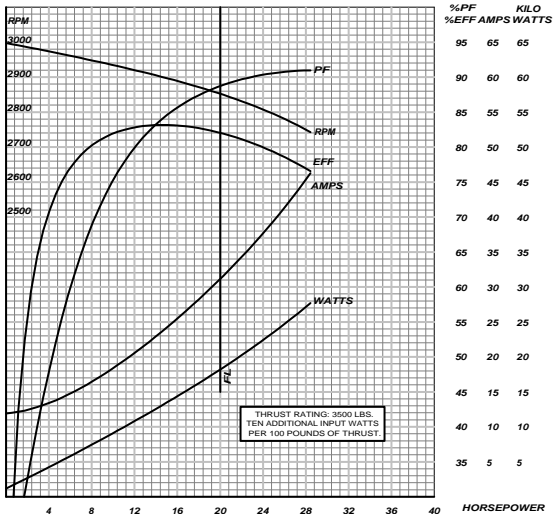

FULL LOAD TORQUE	36.8	LB-FT
BREAKDOWN TORQUE	88.5	LB-FT
LOCKED ROTOR TORQUE	69.0	LB-FT
LOCKED ROTOR AMPS	164	

CURVE NO. 336331-700