


MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	380	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8410	PAGE	16
	APPR BY		DATE	

RATING	FRAME	8 INCH SUB	HP	40
	MODEL	239600	VOLTS	380
	RPM	2900	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

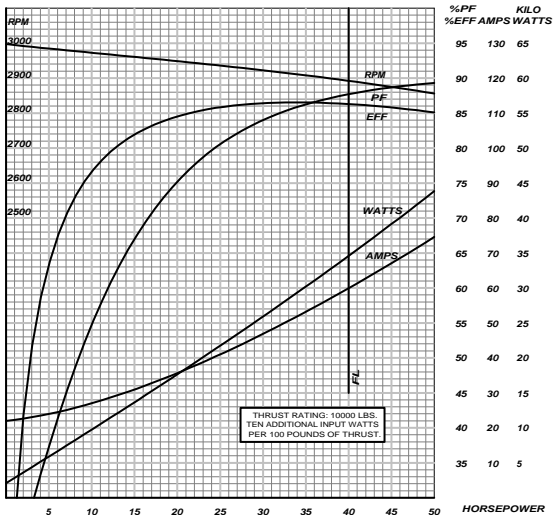

FULL LOAD TORQUE	72.6	LB-FT
BREAKDOWN TORQUE	241	LB-FT
LOCKED ROTOR TORQUE	171	LB-FT
LOCKED ROTOR AMPS	397	