


## MOTOR PERFORMANCE CHARACTERISTICS

<b>T E S T</b>	VOLTS	380	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8449	PAGE	1-N
	APPR BY		DATE	

<b>R A T I N G</b>	FRAME	8 INCH SUB	HP	60
	MODEL	239602	VOLTS	380-415
	RPM	2900	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

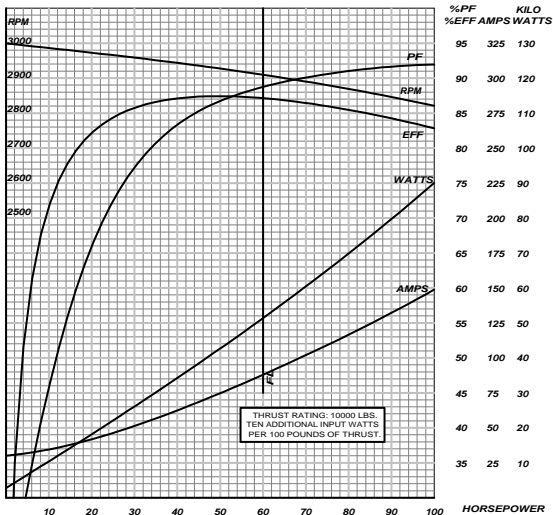

FULL LOAD TORQUE	108	LB-FT
BREAKDOWN TORQUE	358	LB-FT
LOCKED ROTOR TORQUE	256	LB-FT
LOCKED ROTOR AMPS	612	