


MOTOR PERFORMANCE CHARACTERISTICS

T E S T	VOLTS	415	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8449	PAGE	1-Q
	APPR BY		DATE	

R A T I N G	FRAME	8 INCH SUB	HP	60
	MODEL	239602	VOLTS	380-415
	RPM	2900	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

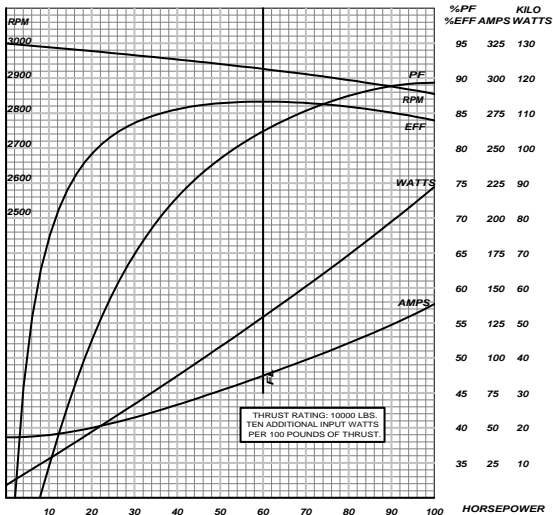

FULL LOAD TORQUE	108	LB-FT
BREAKDOWN TORQUE	426	LB-FT
LOCKED ROTOR TORQUE	305	LB-FT
LOCKED ROTOR AMPS	669	