


MOTOR PERFORMANCE CHARACTERISTICS

| | | | | |
|------|---------|------|---------|----|
| TEST | VOLTS | 380 | HERTZ | 50 |
| | ST.MFD | | RUN MFD | |
| | TEST PR | 8420 | PAGE | 4 |
| | APPR BY | | DATE | |

| | | | | |
|--------|-------|------------|-------|-----|
| RATING | FRAME | 8 INCH SUB | HP | 75 |
| | MODEL | 239603 | VOLTS | 380 |
| | RPM | 2900 | PHASE | 3 |
| | S.F. | 1.00 | HERTZ | 50 |
| | TYPE | 3 PHASE | | |

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

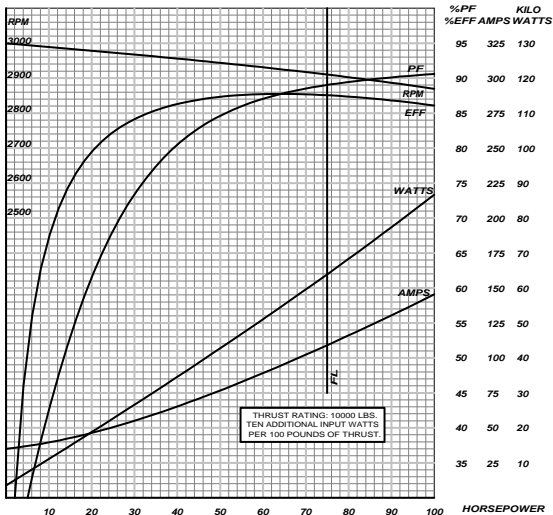

| | | |
|---------------------|-----|-------|
| FULL LOAD TORQUE | 135 | LB-FT |
| BREAKDOWN TORQUE | 457 | LB-FT |
| LOCKED ROTOR TORQUE | 376 | LB-FT |
| LOCKED ROTOR AMPS | 819 | |