




MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	415	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8420	PAGE	4-0
	APPR BY		DATE	

RATING	FRAME	8 INCH SUB	HP	75
	MODEL	239603	VOLTS	415
	RPM	2900	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE

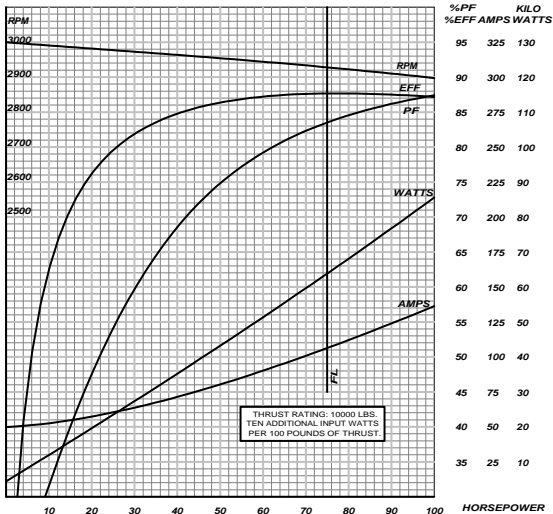

FULL LOAD TORQUE	135	LB-FT
BREAKDOWN TORQUE	546	LB-FT
LOCKED ROTOR TORQUE	448	LB-FT
LOCKED ROTOR AMPS	895	

CURVE NO. 338385-750