




## MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	400	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8420	PAGE	4P
	APPR BY		DATE	

RATING	FRAME	8 INCH SUB	HP	75
	MODEL	239603	VOLTS	400
	RPM	2900	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

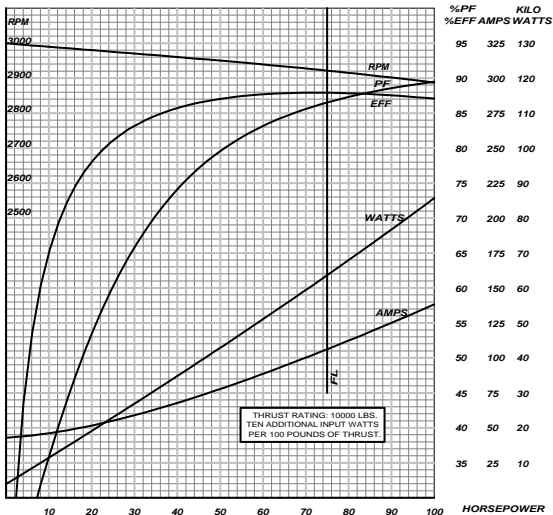

FULL LOAD TORQUE	135	LB-FT
BREAKDOWN TORQUE	507	LB-FT
LOCKED ROTOR TORQUE	417	LB-FT
LOCKED ROTOR AMPS	862	

CURVE NO. 338385-751