




## MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	380	HERTZ	50
	ST.MFD		RUN MFD	
	TEST PR	8422	PAGE	2-R
	APPR BY		DATE	

RATING	FRAME	8 INCH SUB	HP	100
	MODEL	239604	VOLTS	380-415
	RPM	2900	PHASE	3
	S.F.	1.00	HERTZ	50
	TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

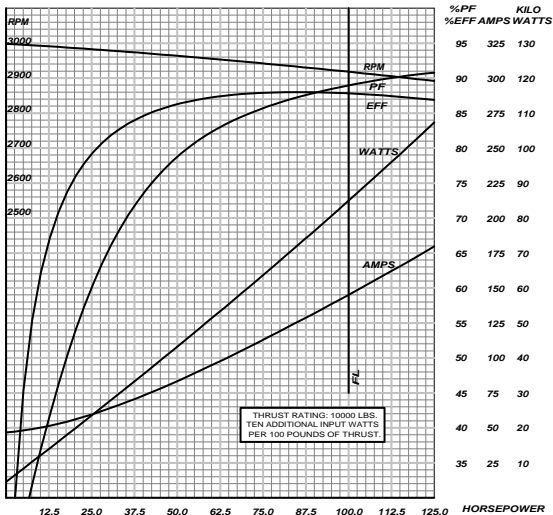

FULL LOAD TORQUE	180	LB-FT
BREAKDOWN TORQUE	596	LB-FT
LOCKED ROTOR TORQUE	375	LB-FT
LOCKED ROTOR AMPS	1099	

CURVE NO. 338386-700