


MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	415	HERTZ	50	RATING	FRAME	12 IN RW	kW	250
	ST.MFD		RUN MFD			MODEL	265712	VOLTS	415
	TEST PR	8813	PAGE	1C		RPM	2940	PHASE	3
	APPR BY		DATE			S.F.	1.00	HERTZ	50
					TYPE	3 PHASE			

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.
 BREAKDOWN AND LOCKED ROTOR VALUES FROM CALCULATION NOT ACTUAL TEST.
 TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

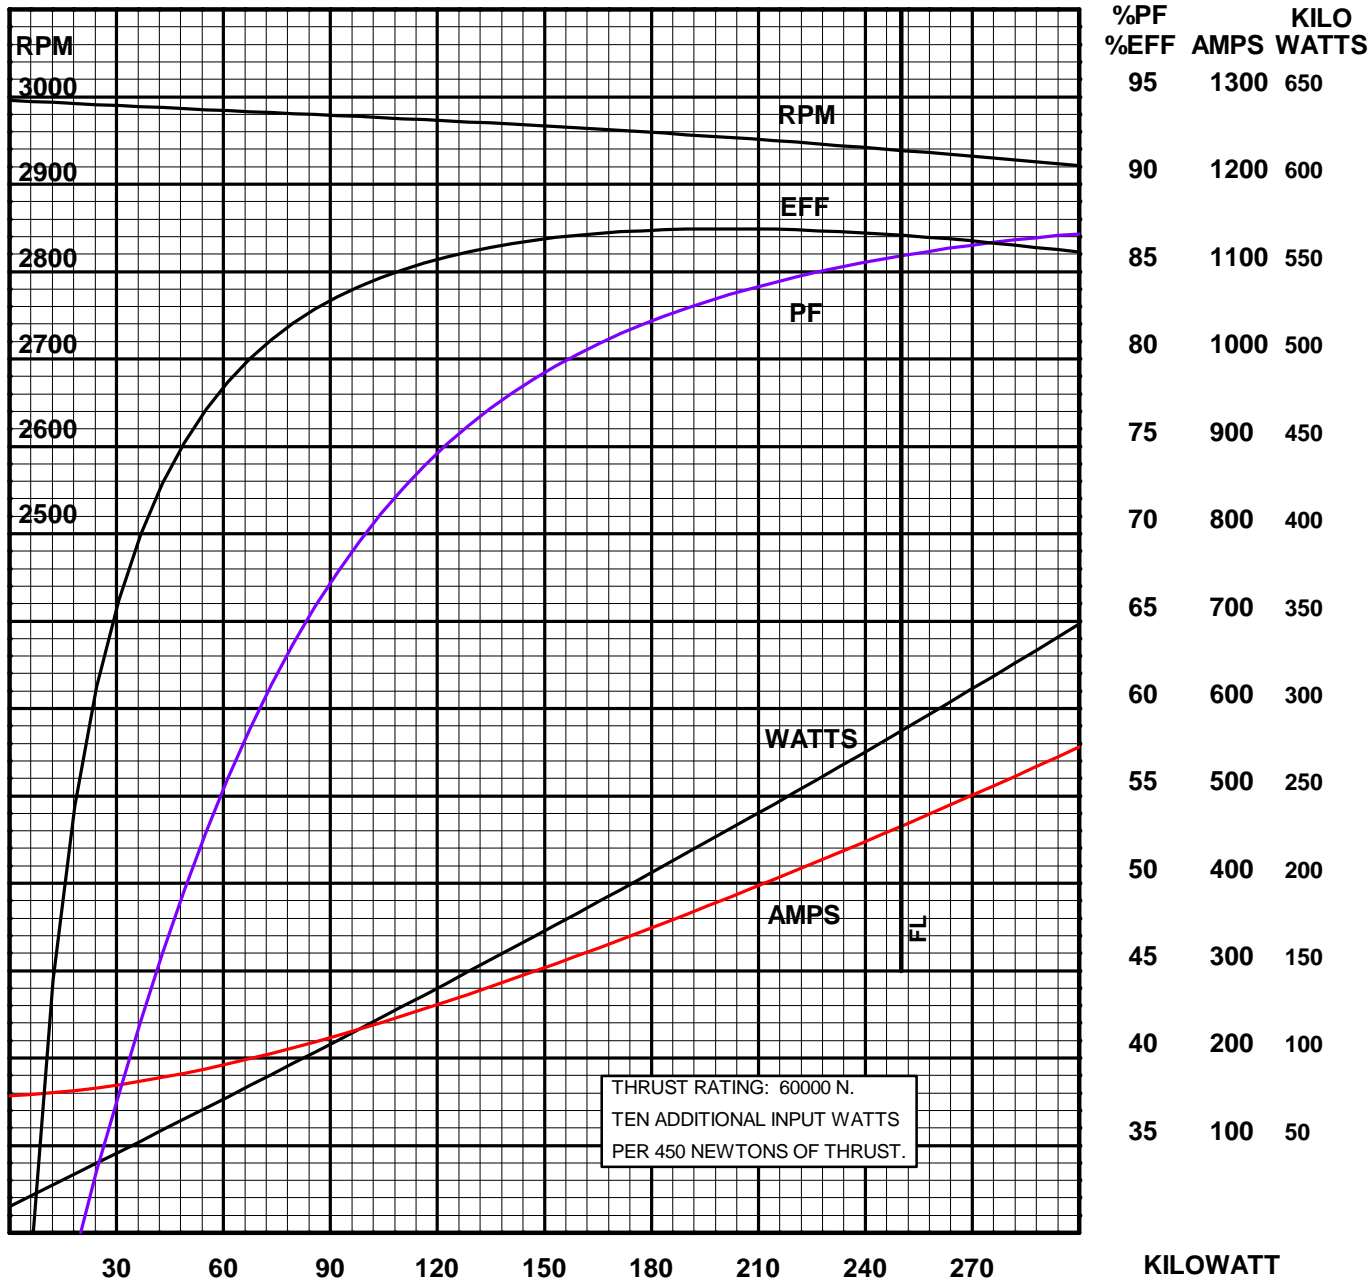

THRUST RATING: 60000 N.
 TEN ADDITIONAL INPUT WATTS
 PER 450 NEWTONS OF THRUST.

FULL LOAD TORQUE	812	N-m
BREAKDOWN TORQUE	1989	N-m
LOCKED ROTOR TORQUE	827	N-m
LOCKED ROTOR AMPS	2612	

KILOWATT
OUTPUT